

Tier1

BloombergNEF



ISO 9001 ISO 14001 SA 8000  
ISO 45001 OHSAS 18001


## 210R HI-EFF BIFACIAL HJT

SP-210R-108DSNxxx


# 485~510W

- Double glass
- Black frame
- Bifacial Transparent

· 15 Yr quality guarantee | 30Yr power warranty

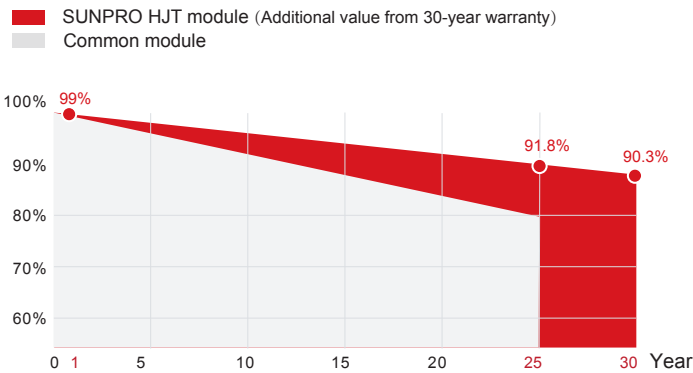

\*SUNPRO Standard tiered warranty

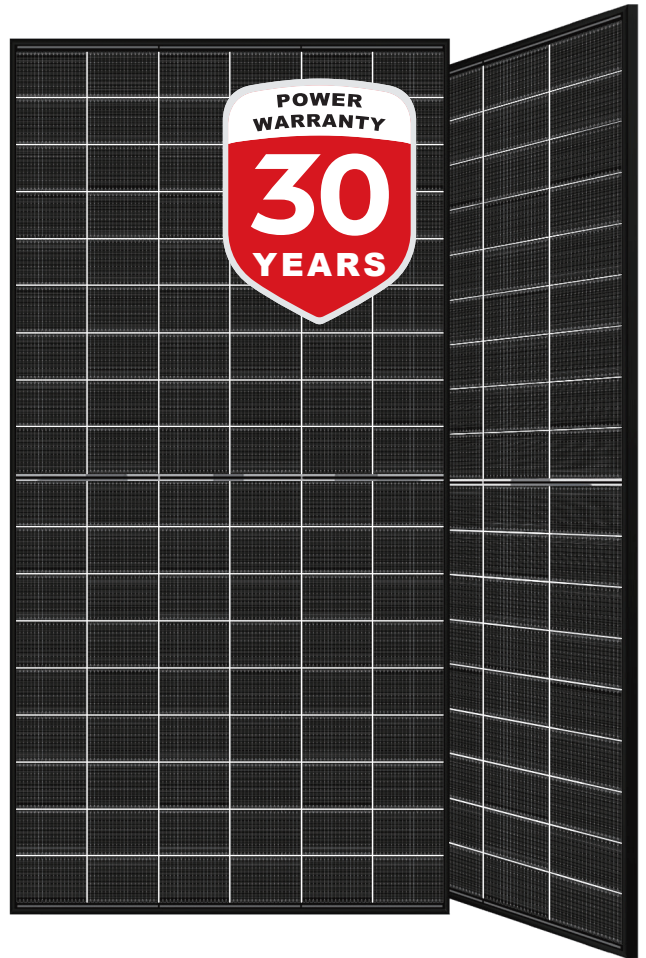

### WARRANTY & GUARANTEE

Linear output power guarantee  
25 years: 91.8% power output  
30 years: 90.3% power output



### WITHSTAND STRONG

Snow load 5400Pa  
Wind load 2400Pa



### ADVANCED BIFACIAL EFFICIENCY

Bifaciality > 90%, effectively improves backside power generation. A bifacial cell design that generates energy from both sides, capturing and converting more sunlight into power.



### R&D AND PRODUCTION

Advanced production line. The leading solar cell cutting process and multi busbar design with SUNPRO Technology.



### HIGH ENERGY YIELD


Efficiency can reach 22.95%. Excellent weak light performance and better performance in hot climate. Leading temperature coefficient for more production when the sun shines strongest, Or under the cloudy, haze condition

## Electrical parameters at standard test conditions (STC:AM=1.5, 1000W/m<sup>2</sup>, Cells Temperature 25°C)

### Typical type

	485W	490W	495W	500W	505W	510W
Max power(Pmax)	485	490	495	500	505	510
Max power voltage(Vmp)	33.83	33.94	34.05	34.16	34.27	34.38
Max power current(Imp)	14.34	14.44	14.54	14.64	14.74	14.84
Open circuit voltage(Voc)	40.43	40.54	40.65	40.76	40.87	40.98
Short circuit current(Isc)	15.15	15.26	15.37	15.48	15.59	15.7
Module Efficiency(%)	21.82	22.05	22.27	22.50	22.72	22.95
Max system voltage	DC 1500V(TÜV)					
Maximum Series Fuse Rating	30A					

### DIMENSIONS AND STRUCTURE

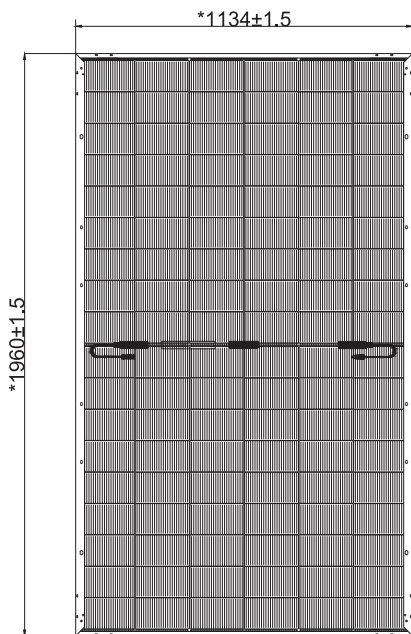


### Electrical Characteristics with 15% Rear Side Power Gain

Front power Pmax/W	485W	490W	495W	500W	505W	510W
Total power Pmax/W	557.75	563.50	569.25	575.00	580.75	586.50
Vmp/V(Total)	33.83	33.94	34.05	34.16	34.27	34.38
Imp/A(Total)	16.49	16.60	16.72	16.83	16.95	17.06
Voc/V(Total)	40.43	40.54	40.65	40.76	40.87	40.98
Isc/A(Total)	17.42	17.55	17.67	17.80	17.92	18.05

### Mechanical Data

Dimensions	1960x1134x30mm
Weight	27.4kg
Glass	(F) 2.0mm ultra clear embossed semi-tempered coated glass (B) 2.0mm white mesh glazed tempered glass
Output cables	4mm <sup>2</sup> , 1100mm in length, length can be customized / UV Resistant
Connectors	MC4 compatible IP68
Cell type	Mono-Crystalline ,Bifacial HJT, 182mm x 105mm
Number of cells	108 cells ( Half-Cell )

### I-V CHARACTERISTICS AT DIFFERENT IRRADIATION

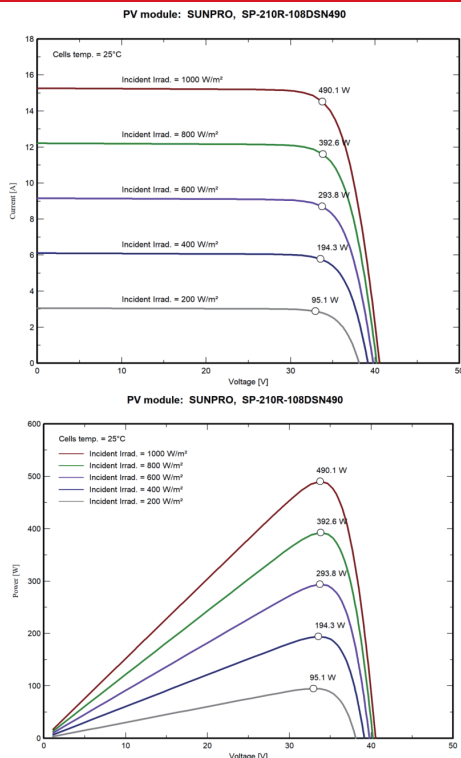

### Temperature Characteristics

### Packing Configuration

Temp.Coeff.of Isc(TK Isc)	0.04%/°C	Container	40'HQ
Temp.Coeff.of Voc(TK Voc)	-0.24%/°C	Pieces per pallet	36
Temp.Coeff.of Pmax(TK Pmax)	-0.24%/°C	Pallets per container	24
Operating temperature	-40~+85°C	Pieces per container	864
Normal operating cell temperature	44±2°C		

### Tests, Certifications and Warranties

Standard tests	IEC 61215, IEC 61730
System certs	ISO 9001, ISO14001, ISO45001
Certifications	TÜV, CE
Extreme wind and snow loads testing	Withstand extreme wind(2400 Pascal) and snow loads(5400 Pascal)
Power tolerance	0~+5W
Junction box	IP 68
Warranties	15 years product warranty and 30 years 90.3% of power