


Tier1

BloombergNEF

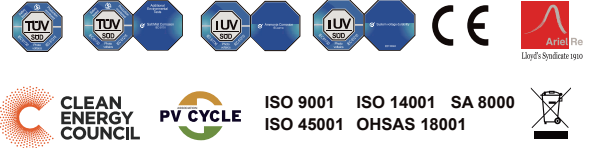


M12 TOPCON BIFACIAL

SPDGxxx-N132M12


685~720W

- Double glass
- Silver frame
- Bifacial Transparent

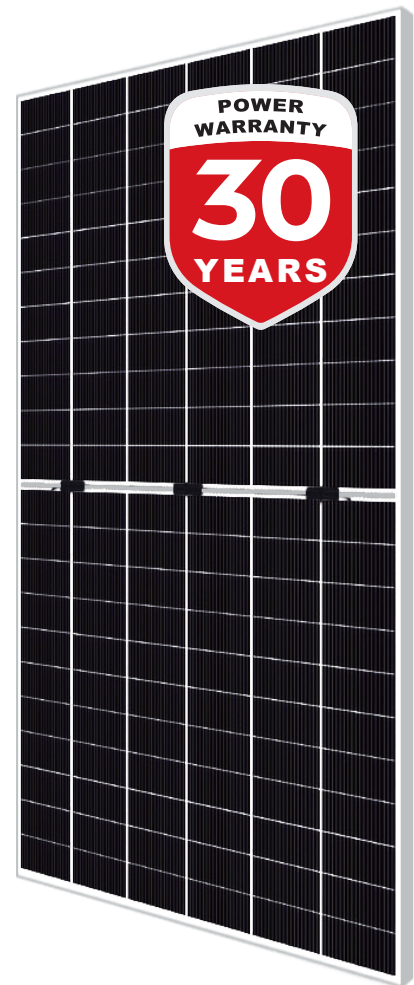

25 Yr quality guarantee | 30 Yr power warranty

■ SUNPRO TOPCon module (Additional value from 30-year warranty)
 ■ Common module

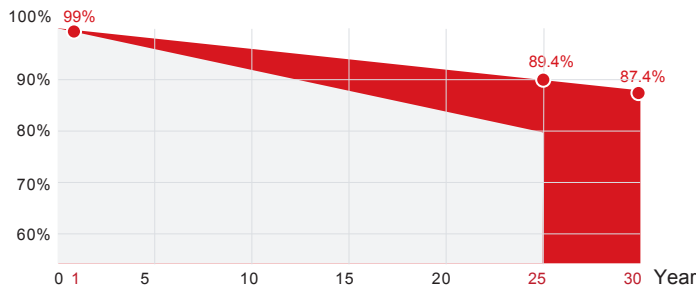

*SUNPRO Standard tiered warranty



WARRANTY & GUARANTEE

Linear output power guarantee
 25 years: 89.4% power output
 30 years: 87.4% power output



WITHSTAND STRONG

Snow load 5400Pa
 Wind load 2400Pa



PID RESISTANCE

Power positive tolerance: 0~+5W.
 The attenuation probability of PID phenomenon is minimized through battery production technology optimization and material control



R&D AND PRODUCTION

Advanced production line. Bifaciality>80%, effectively improves backside power generation. The leading solar cell cutting process and multi busbar design with SUNPRO Technology.



HIGH EFFICIENCY

N-type, Components have better reliability and lower LID/LETID attenuation. Efficiency can reach 23.18%. Excellent low light performance. Higher power output under the conditions of haze, overcast, etc.

Electrical parameters at standard test conditions (STC:AM=1.5, 1000W/m², Cells Temperature 25°C)

Typical type

	685W	690W	695W	700W	705W	710W	715W	720W
Max power(Pmax)	685	690	695	700	705	710	715	720
Max power voltage(Vmp)	39.91	40.12	40.32	40.51	40.69	40.88	41.07	41.27
Max power current(Imp)	17.17	17.2	17.24	17.28	17.33	17.37	17.41	17.45
Open circuit voltage(Voc)	47.69	47.88	48.08	48.27	48.46	48.65	48.85	49.04
Short circuit current(Isc)	18.21	18.25	18.28	18.32	18.36	18.4	18.44	18.48
Module Efficiency(%)	22.05	22.21	22.37	22.53	22.70	22.86	23.02	23.18
Max system voltage	DC 1500V (TÜV)							
Maximum Series Fuse Rating	35A							

Electrical Characteristics with 15% Rear Side Power Gain


Front power Pmax/W	685W	690W	695W	700W	705W	710W	715W	720W
Total power Pmax/W	787.75	793.5	799.25	805	810.75	816.5	822.25	828
Vmp/V(Total)	39.91	40.12	40.32	40.51	40.69	40.88	41.07	41.27
Imp/A(Total)	19.74	19.78	19.82	19.87	19.93	19.97	20.02	20.06
Voc/V(Total)	47.69	47.88	48.08	48.27	48.46	48.65	48.85	49.04
Isc/A(Total)	20.94	20.99	21.02	21.07	21.11	21.16	21.21	21.25

Electrical parameters at NMOT test conditions

(Irradiance 800W/m², Ambient Temperature 20°C, AM 1.5, Wind Speed 1m/s)

Typical type	685W	690W	695W	700W	705W	710W	715W	720W
Max power(Pmax)	517.7	521.7	525.6	529.5	533.8	537.9	541.9	546
Max power voltage(Vmp)	37.4	37.6	37.8	38	38.2	38.40	38.60	38.8
Max power current(Imp)	13.84	13.87	13.91	13.94	13.98	14.01	14.04	14.07
Open circuit voltage(Voc)	45.2	45.4	45.6	45.8	46	46.20	46.40	46.6
Short circuit current(Isc)	14.65	14.68	14.70	14.74	14.77	14.80	14.83	14.86

DIMENSIONS AND STRUCTURE

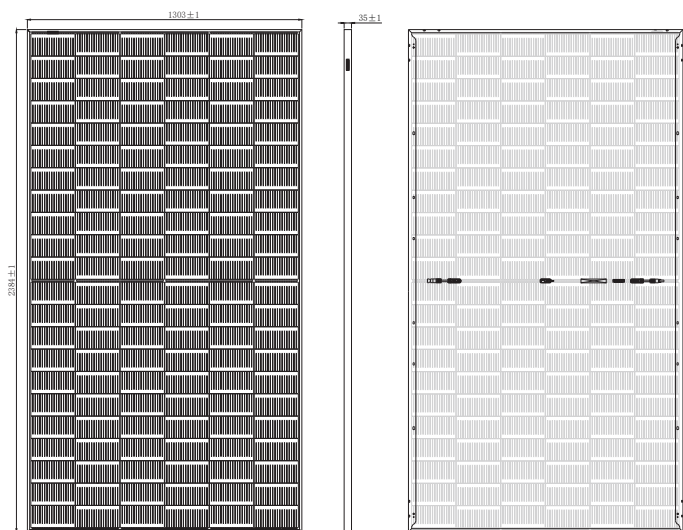

Mechanical Data


Dimensions	2384×1303×35mm
Weight	38.3kg
Glass	(F) 2.0mm anti-glare glass (B) 2.0mm glazed tempered glass
Output cables	4mm ² , symmetrical lengths 1300mm
Connectors	MC4 compatible IP68
Cell type	Mono-Crystalline, N type Bifacial, 210mm x 105mm
Number of cells	132cells (Half-Cell)

Temperature Characteristics

Packing Configuration

Temp.Coeff.of Isc(TK Isc)	0.045%/°C	Container	40'HQ
Temp.Coeff.of Voc(TK Voc)	-0.25%/°C	Pieces per pallet	16
Temp.Coeff.of Pmax(TK Pmax)	-0.30%/°C	Pallets per container	36
Operating temperature	-40~+85°C	Pieces per container	558
Normal operating cell temperature	45±2°C		

I-V CHARACTERISTICS AT DIFFERENT IRRADIATION

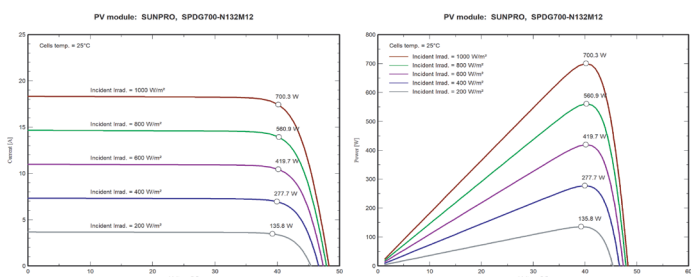

Tests, Certifications and Warranties

Standard tests	IEC 61215, IEC 61730
System certs	ISO 9001, ISO14001, ISO45001
Certifications	TÜV, WEEE
Extreme wind and snow loads testing	Withstand extreme wind(2400 Pascal) and snow loads(5400 Pascal)
Power tolerance	0~+5W
Junction box	IP 68
Warranties	25 years product warranty and 30 years 87.4% of power